



SMARTDAC+™

Data Acquisition & Control

Bulletin 04L52B01-01EN

www.smartdacplus.com

Data Acquisition & Control

SMARTDAC+™

Your business environment is complex and fast changing. You need smart and powerful systems that can adapt to your process.

SMARTDAC+™ is a fresh approach to data acquisition and control, with smart and simple touch operation as a design priority. Measure, display and archive process data with greater levels of clarity, intelligence and accessibility.

The SMARTDAC+™ concept begins with the all-new GP, an integrated I/O and recording system with a familiar touch operator interface. Highly adaptable, very capable and easy to operate is the new GP.

Now that's SMART.



Smart User Interface

Provides a smooth, familiar user experience



Observe

- Variety of display functions
- Powerful data search functions
- Status indicator lamp functions

Interact

- Touch screen for intuitive operation
- Easy-to-navigate, user-oriented design
- Supports freehand messages

Smart Architecture

Enables a scalable data acquisition system



Adapt


- Add I/O modules when you need more channels
- Low temperature operation
- Locking front panel for media security

Measure

- Wide-ranging input/output specifications
- Multichannel I/O
- Easy-to-read screens

Smart Functionality

Offers a seamless data transfer environment


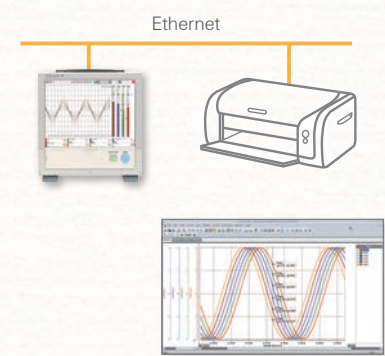


Record


- Direct output to printers
- Convenient report creation function
- Viewer software for data analysis

Connect


- Browser-based real time monitoring
- Centralized data management via FTP server
- Powerful networking functions



Paperless recorders (portable type)




Input/output modules



STANDARD software

Smart User Interface

An intuitive UI engineered for ease-of-use

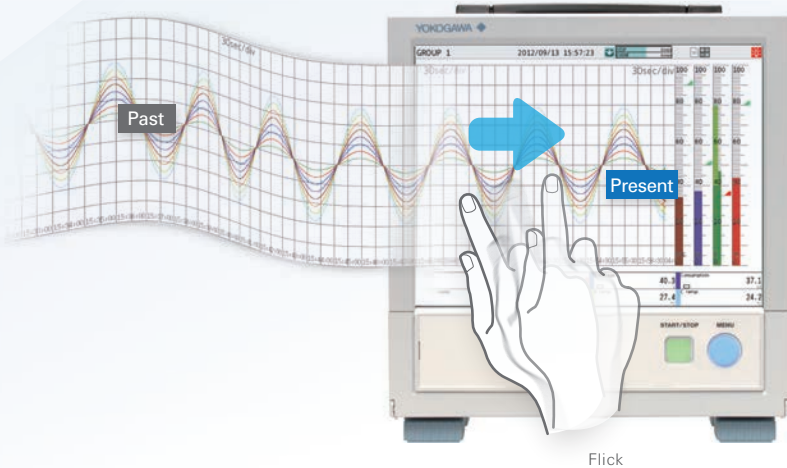

Seamless display of historical trends


Flick or drag even during measurement to scroll data for seamless display of historical trends.



The touch screen works even when you are wearing gloves.

All historical trends can be displayed in one screen.


Zoom in or out on the time axis



Pinch apart / Pinch together

Pinch together : Zooms out on the time axis
Pinch apart : Zooms in on the time axis

Move the scale to view details

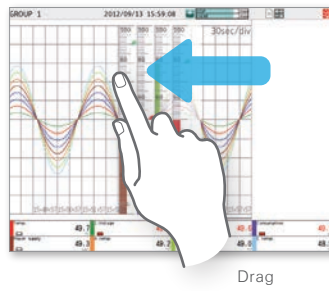


Drag

[Patent pending]

Drag the scale to display corresponding digital values.

You can insert your own BMP images to customize the scale.

Change the position of digital values

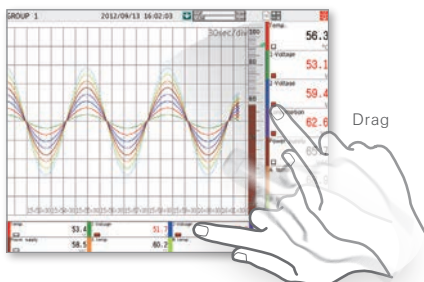


You can drag the digital display section up, down, left, or right to change its position.


Powerful search functions

Easily find data using various displays including calendars and summary screens.

Search from a calendar

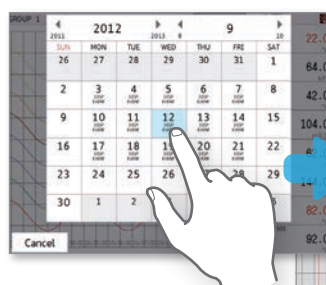

Search from a variety of summary screens

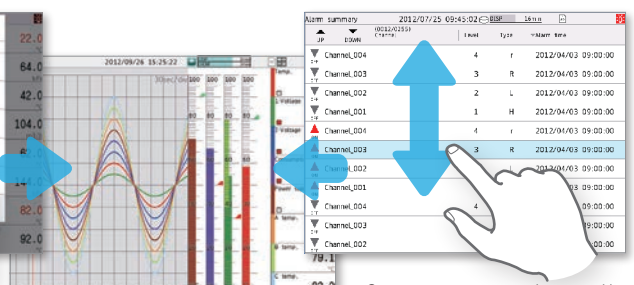


Historical trend screen




Summary screens can be sorted by item for faster searching.

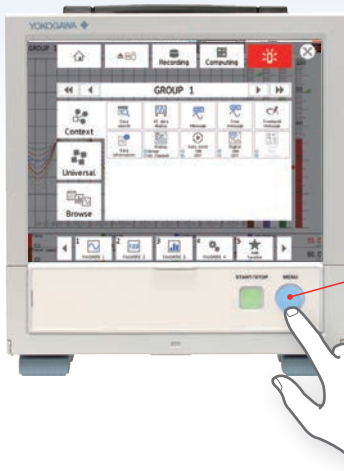

● **Display the menu at the push of a button**




Simply push the front panel MENU key once to display the menu screen. The menu screen gives you access to a variety of functions. The MENU key is backlit by a color LED that indicates operating and alarm status.

-  **Blue:**Running (no alarms)
-  **Red:**Alarm occurring
-  **Not lit:**Power off

● **Connect a mouse and keyboard for a "PC feel"**

With the USB interface option, you can connect a keyboard and/or mouse to control on-screen operations (text input, etc.). And with USB memory, you can save data and easily transfer it to a PC.

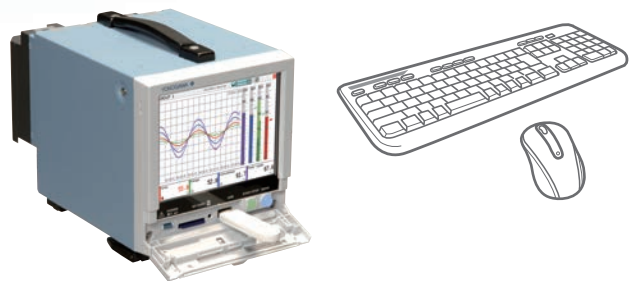

● **Write freehand messages**

You can draw or hand-write on the waveform area using a stylus (included) or the tip of your finger. You can even select a color and line width.



● **User interface designed for real people**


Human factor led design concepts guided us in everything from screen colors and button sizes to navigation between screens—the result is an intuitive and easy user experience. The menu screen is translucent, so you can even keep your eye on your data while entering settings.



● **Monitor multiple screens at once on the multi-panel display**

You can divide the display into 2 to 6 sections and assign each to your choice of screen. You can select from 9 forms (of 2 to 6 screens each), and save up to 20 multi-panel configurations.

Multi-panel display

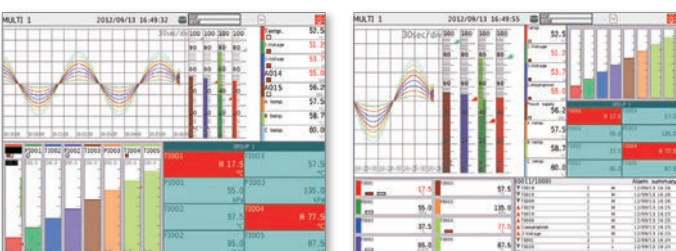


The multi-panel display is supported only by the GP20.

Smart Architecture

Highly flexible and scalable architecture

GP20

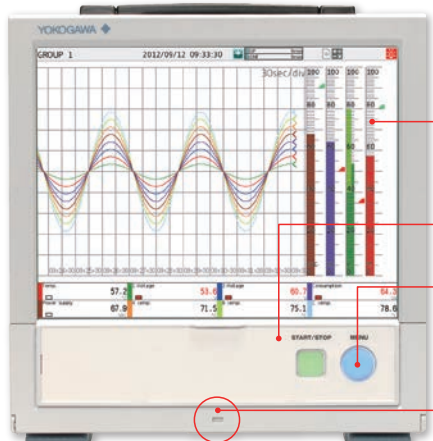

LCD screen

Displays operating screens such as trend graphs, and setting screens.

Operation panel

MENU key

Simply press the MENU key to display a menu for access to a variety of screens.

Front panel door lock mechanism

With front panel door open

START/STOP key

Starts and stops recording.

Stylus

For writing freehand messages.

USB port [Option]


Supports USB 2.0.

SD memory card slot

SD memory card (up to 32 GB)
(format: FAT32 or FAT16), 1 GB included

Power switch

The main unit power switch.

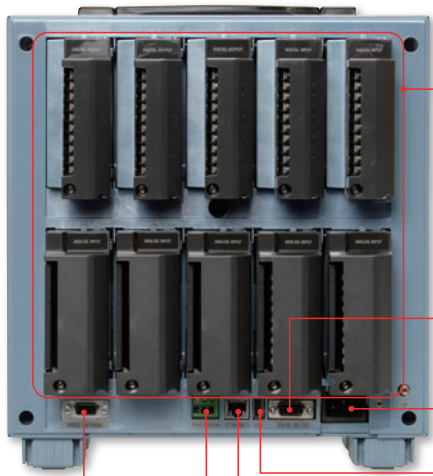

Input/output module slots

For connecting input/output signal wires from the device under test. For connecting input/output signal wires for hardware options.

Serial communications port [Option]

Terminal for RS-422/485 or RS-232 communications.

Power inlet (GP10/GP20)

USB port [Option]

Ethernet Port


A 10Base-T/100Base-TX port.

FAIL output terminal [Option]

VGA output connector [Option]

External monitor connector.

GP10

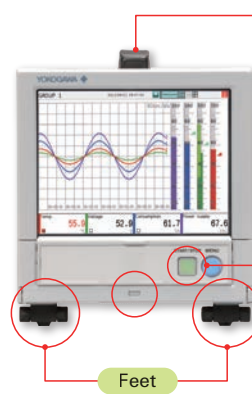

Handle

The START/STOP key can be used when the operation panel is closed.

Feet



Easy-to-read display

GP20: 12.1" TFT color LCD, 800×600 dots
GP10: 5.7" TFT color LCD, 640×480 dots

● **Modular construction for expandable input/output**

Select from a wide variety of input/output modules. The I/O terminals are detachable and come in M3 screw and clamp-terminal types. The highly flexible design allows you to add or remove modules at any time in the future.




* The GX90YD is only available with M3 screw type terminals.

Your choice of input/output

- GX90XA analog input module: DC voltage, thermocouple, RTD, contact input
- GX90XD digital input module: Remote control, and more (open collector / non-voltage contact input)
- GX90YD digital output module: Alarms, and more (relay, c contact input)

● **Multichannel measurement and recording**


Supports up to 100 channels of input.

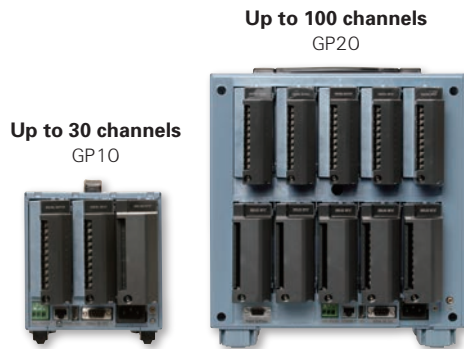

● **Heat dissipating construction**

The GP was built for heat dissipation to ensure an even temperature distribution between module terminals.

Heat analysis result

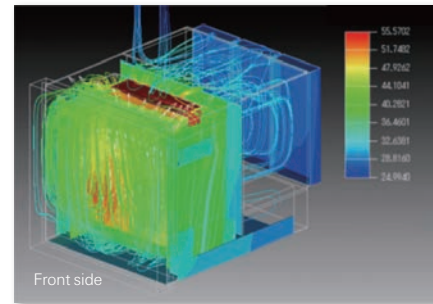

● **Portable models**

Our portable models are easy to take anywhere, and offer the same functionality and ease-of-use.



● **Highly secure**


The front panel door can be locked to prevent mishandling of the power switch or external media.



● **Report and printer output functions**

Printer output function

You can print out reports and snapshots directly from the GP without going through a PC.

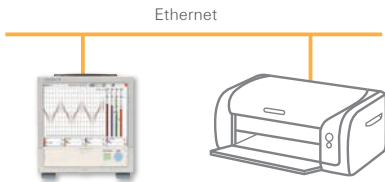


Report creation function

For each type of report, you can output to a PDF file according to specifiable formats.



Excel spreadsheet template function

Reports can be created automatically using a spreadsheet template created in Excel. Excel compatibility means greatly reduced time and effort spent on reporting.

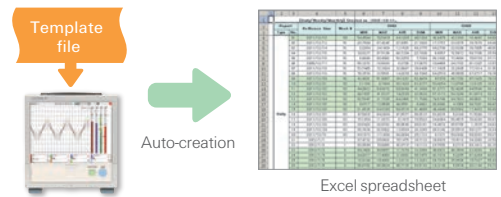


● **Main networking functions**

FTP-based file transfer


FTP client function



- Display data files
- Event data files
- Report files
- Screenshot (snapshot) files



FTP server function



- On storage media:
- Display data files
 - Event data files
 - Report files...etc.

The FTP client/server functions allow you to easily share and manage data from a centralized file server.


Modbus/TCP (Ethernet connection)

Modbus client



The data of server units can be displayed and saved on the GP using the Modbus/TCP function*.

* Communication function option is required.

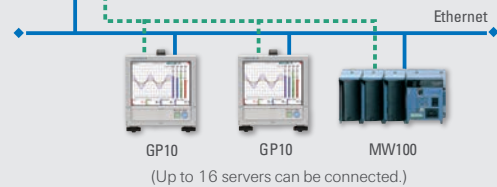


Modbus RTU (RS-422A/485 connection)

Modbus master



The data of slave units can be displayed and saved on the GP using the Modbus RTU function*.

* Communication function option is required.

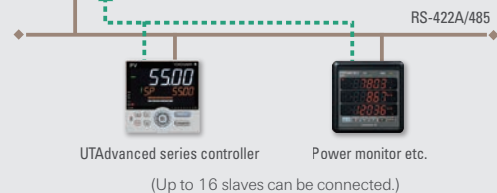

The following network functions are also supported


- E-mail sending
- Time synchronization (SNTP)
- Automated network settings (DHCP)

Reliable and durable

Highly secure with proven reliability

● Data redundancy

Data redundancy through the internal memory and external storage media.




Measured and calculated data is continuously saved to secure, internal non-volatile flash memory. At manual or scheduled intervals, the files in memory are copied to the removable media, which is also secure flash memory. In addition, the files can be copied and archived to an FTP server. Because of the inherent reliability and security of flash memory and the storage methods used, the possibility of losing data under any operating condition or power failure event is extremely small. When FTP transfer functions are used, three copies of the same data file can exist at the same time in three locations, thus providing a high level of redundancy.

● Splash-proofing without compromising display quality


The protective sheets on the touch panel display have a special coating on the front and back to prevent damage from scratches, chemicals, and solvents while maintaining a high display clarity and resistance to light interference.

* Visual clarity is enhanced by suppression of the concentric circles that can appear due to light interference.

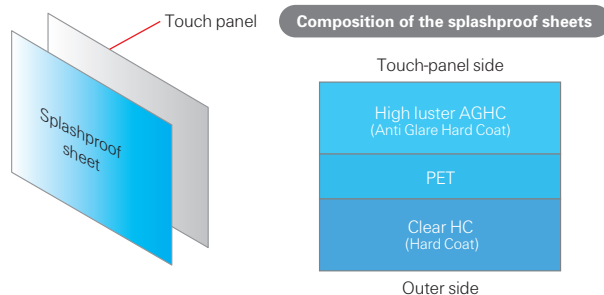

● Selectable data saving format (binary or text)

For increased security, measured data can be saved in binary format. This format is very difficult to decipher or modify in traditional text editors or other programs. To enable easy and direct opening of the data in text editors or spreadsheet programs, choose text format. This allows you to work with your measurement data without dedicated software.



● High capacity internal memory

Even longer recording durations, and multichannel recording.

Display data file sample time

Measurement CH = 30 channels. Math CH = 0 channels.

Internal Memory	500 MB
Display update (minute/div)	30 minutes
Sampling period (s)	60 s
Total sample time	Approx. 2.5 years

Event data file sample time

Measurement CH = 30 channels. Math CH = 0 channels.


Internal Memory	500 MB
Sampling period (s)	1 s
Total sample time	Approx. 1 months

● Standards supported



● Two-point touch screen technology

Traditional resistive touch screens can detect only one touch point. The built in controller and algorithm of the GP can detect two touch points, allowing intuitive pan and zoom functions during trend monitoring—a first among paperless recorders.

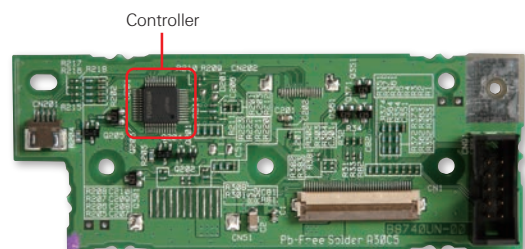

MAIN SPECIFICATIONS

For detailed specifications, see the General Specifications (GS 04L52B01-01 EN)



Model		GP20	GP10
Construction		Portable	Portable
Display		12.1" TFT color LCD (800 × 600 dots)	5.7" TFT color LCD (640 × 480 dots)
Touch screen		4 wire resistive touch screen, 2-point touch detection	
Max. no. of connectable modules		10 (max. no. of measurement channels: 100)	3 (max. no. of measurement channels: 30)
* The maximum number of connectable modules is limited by the maximum number of I/O channels, and differs depending on the types and combinations of modules.			
No. of mathematical channels		100	50
No. of communication channels		300	50
Internal memory		500 MB (media: flash memory)	
External storage media		SD memory card (up to 32 GB) (format: FAT32 or FAT16), 1 GB included USB interface (/UH option): USB 2.0 compliant (external storage media: USB flash memory) (Keyboard/mouse: HID Class Ver. 1.1 compliant)	
Communication functions		Ethernet (10BASE-T/100BASE-TX), IEEE802.3 compliant (Ethernet frame type: DIX) Connecting configuration: Cascade max. 4 level (10BASE-T), max. 2 level (100BASE-TX), segment length: Max. 100 m E-mail inform function (E-mail client), FTP client function, FTP server function, Web server function, SNTP client function, SNTP server function, DHCP client function Modbus/TCP (client*/server functions) */MC option is required.	
Options		Serial communications (/C2: RS-232, /C3: RS-422 or RS-485) Modbus/RTU (master/slave functions)	
Other functions		Security functions: Key lock function, login function Clock functions: With calendar function, accuracy: ±5 ppm (0 to 50°C) LCD saver function	
Rated supply voltage		100 to 240 VAC (allowable power supply voltage range: 90 to 132 VAC, 180 to 240 VAC)	
Rated supply frequency		50/60 Hz	
Power consumption		Max. 85 VA (100 VAC), max. 110 VA (240 VAC)	Max. 45 VA (100 VAC), max. 60 VA (240 VAC)
Insulation resistance		Between the Ethernet, RS-422/485, and each insulation terminal and earth: 20 MΩ or greater (at 500 VDC)	
Withstand voltage		Between the power terminal and earth: 3000 V AC (50/60 Hz) for one minute	
External dimensions (W × H × D)	Main Unit	288 × 318 × 197 (mm)	144 × 168 × 197 (mm)
	Including modules	288 × 318 × 248 (mm)	144 × 168 × 248 (mm)
Weight (main unit only)		Approx. 5.7 kg	Approx. 1.9 kg

Analogue input module (Universal input module)

Model		GX90XA	
Input type (Inputs: 10)	DCV	20 mV, 60 mV, 200 mV, 1 V, 2 V, 6 V, 20 V, 50 V	RTD Pt100, JPt100, Cu10 GE, Cu10 L&N, Cu10 WEED, Cu10 BAILEY, Cu10 (20°C) α=0.00392, Cu10 (20°C) α=0.00393, Cu25 (0°C) α=0.00425, Cu53 (0°C) α=0.00426035, Cu100 (0°C) α=0.00425, J263B, Ni100 (SAMA), Ni100 (DIN), Ni120, Pt25, Pt50, Pt200 WEED, Cu10 GOST, Cu50 GOST, Cu100 GOST, Pt46 GOST, Pt100 GOST DI Level, Contact
	Standard signal	0.4-2 V, 1-5 V	
	Thermocouple	R, S, B, K, E, J, T, N, W, L, U, W97Re3-W75Re25, KpsvAu7Fe, Platinel 2, PR20-40, NiNiMo, W/WRe26, N (AWG 14), XK GOST	
	Scan intervals	100/200/500 ms, 1/2/5 s	
Power supply and consumption		Supplied from main unit, power consumption: 0.7 W or less	
Insulation resistance		Between input circuits and internal circuitry: 20 MΩ or greater (at 500 VDC)	
Withstand voltage		Between the input circuits and the internal circuitry: 3000 V AC for one minute; between analog input channels: 1000 V AC for one minute (excluding b terminals)	
Terminal types		M3 screw terminals or clamp terminals	
Weight		Approx. 0.3 kg	

Digital input module

Model		GX90XD	
Input types (inputs: 16)	ON/OFF detection	Open collector: Voltage of 0.5 V DC or less when ON, current of 0.5 mA or less when OFF Non-voltage contact: Resistance of 200 Ω or less when ON, 50 kΩ when OFF	
	Contact rating	12 V DC, 20 mA or more	
Power supply and consumption		Supplied from main unit, power consumption: 0.7 W or less	
Insulation resistance		Between input terminals and internal circuitry: 20 MΩ or greater (at 500 V DC)	
Withstand voltage		Between input terminals and internal circuitry: 1500 V AC for one minute	
Terminal types		M3 screw terminals or clamp terminals	
Weight		Approx. 0.3 kg	


Digital output module

Model		GX90YD	
Output types (outputs: 6)		Relay contact (c contact)	
Rated load voltage		100 to 240 V AC or 5 to 24 V DC	
Max. load voltage/current		264 VAC or 26.4 VDC, 3A/point (resistance load)	
Power supply and consumption		Supplied from main unit, power consumption: 1.4 W or less	
Insulation resistance		Between output terminals and internal circuitry: 20 MΩ (at 500 VDC)	
Withstand voltage		Between output terminals and internal circuitry: 3000 V AC for one minute	
Terminal types		M3 screw terminals	
Weight		Approx. 0.3 kg	


External dimensions

Unit: mm (approx.: inch)

GP10



GP20

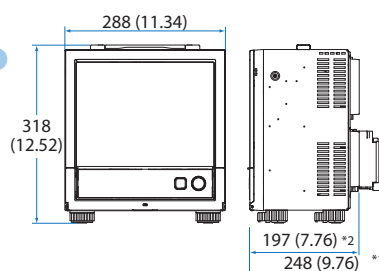

*1 With module, *2 Without modules

MODEL AND SUFFIX CODES

GP10/GP20 MODEL AND SUFFIX CODES

Model	Suffix Code	Optional code	Description
GP10			Paperless recorder (Portable type, Small display)
GP20			Paperless recorder (Portable type, Large display)
Type	-1		Standard
Display language	E		English, degF, DST (summer/winter time) *9
Power supply	1		100 V AC, 240 V AC
Power cord	D		Power cord UL/CSA standard
	F		Power cord VDE standard
	R		Power cord AS standard
	Q		Power cord BS standard
	H		Power cord GB standard*
	N		Power cord NBR standard
Optional features	/C2		RS-232 *1
	/C3		RS-422/485 *1
	/D5		VGA output *2
	/FL		Fail output, 1 point
	/MT		Mathematical function (with report function)
	/MC		Communication channel function
	/UH		USB interface (Host 2 ports)

Analog input module, Digital I/O module:When the built-in module

Please add the following suffix codes to the main unit model and specification codes.

GP[0-1][10/00]	Optional code	Description
Optional features (Analog input) *3	/UC10	With analog input module, 10 ch (Clamp terminal)
	/UC20	With analog input module, 20 ch (Clamp terminal) *6
	/UC30	With analog input module, 30 ch (Clamp terminal) *7
	/UC40	With analog input module, 40 ch (Clamp terminal) *4
	/UC50	With analog input module, 50 ch (Clamp terminal) *4
	/US10	With analog input module, 10 ch (M3 screw terminal)
	/US20	With analog input module, 20 ch (M3 screw terminal) *6
	/US30	With analog input module, 30 ch (M3 screw terminal) *7
	/US40	With analog input module, 40 ch (M3 screw terminal) *4
	/US50	With analog input module, 50 ch (M3 screw terminal) *4
Optional features (Digital I/O) *3	/CR01	With digital I/O module, (Output:0, Input:16) *7 *8
	/CR10	With digital I/O module, (Output:6, Input:0) *7
	/CR11	With digital I/O module, (Output:6, Input:16) *6 *7 *8
	/CR20	With digital I/O module, (Output:12, Input:0) *5
	/CR21	With digital I/O module, (Output:12, Input:16) *5 *8
	/CR40	With digital I/O module, (Output:24, Input:0) *5
	/CR41	With digital I/O module, (Output:24, Input:16) *5 *8

- *1 /C2 and /C3 cannot be specified together.
- *2 /D5 can be specified only for the GP20.
- *3 Only one option can be specified.
- *4 /UC40, /UC50, /US40 and /US50 cannot be specified for the GP10.
- *5 /CR20, /CR21, /CR40 and /CR41 cannot be specified for the GP10.
- *6 If /UC20 or /US20 is specified, /CR11 cannot be specified for the GP10.
- *7 If /UC30 or /US30 is specified, /CR01, /CR10 and /CR11 cannot be specified for the GP10.
- *8 A digital input module has M3 screw terminals.
- *9 The Display language is selectable from English, German, French, Russian, Korean, Chinese, Japanese. (As of Mar., 2013)
To confirm the current available languages, please visit the following website.
URL: <http://www.yokogawa.com/ns/language/>

*When ordering units with built-in modules, the total number of channels allowed is 100 (10 modules) including any modules ordered individually.

Standard Accessories

Product	Qty
SD memory card (1GB)	1
Stylus	1

Optional Accessories (Sold Separately)

Product	Part Number/Model
SD memory card (1GB)	773001
Shunt resistor for screw terminal (M3) (10 Ω ± 0.1%)	X010-010-3
Shunt resistor for screw terminal (M3) (100 Ω ± 0.1%)	X010-100-3
Shunt resistor for screw terminal (M3) (250 Ω ± 0.1%)	X010-250-3
Shunt resistor for clamp terminal (10 Ω ± 0.1%)	438922
Shunt resistor for clamp terminal (100 Ω ± 0.1%)	438921
Shunt resistor for clamp terminal (250 Ω ± 0.1%)	438920

vigilantplant and SMARTDAC+ are registered trademarks or trademarks of Yokogawa Electric Corporation. Microsoft and Windows are registered trademarks or trademarks of Microsoft Corporation in the United States and other countries. Other company names and product names appearing in this document are registered trademarks or trademarks of their respective holders.

Analog input module, Digital I/O module:When the individual modules

MODEL and SUFFIX Code (GX90XA)

Model	Suffix Code	Description
GX90XA		Analog Input Module
Number of channels	-10	10 channels
Type	-UJ2	Universal, Scanner type (3-wire RTD b-terminal common)
-	N	Always N
Terminal form	-3	Screw terminal (M3)
-	-C	Clamp terminal
Area	N	General

MODEL and SUFFIX Code (GX90XD)

Model	Suffix Code	Description
GX90XD		Digital Input Module
Number of channels	-16	16 channels
Type	-11	Open collector/Non-voltage, contact (shared common), Rated 5 VDC
-	N	Always N
Terminal form	-3	Screw terminal (M3)
-	-C	Clamp terminal
Area	N	General

MODEL and SUFFIX Code (GX90YD)

Model	Suffix Code	Description
GX90YD		Digital Output Module
Number of channels	-06	6 channels
Type	-11	Relay, SPDT(NO-C-NC)
-	N	Always N
Terminal form	-3	Screw terminal (M3)
Area	N	General

Calibration certificate (sold separately)

When ordering the GP10/GP20 with options (analog input), the calibration certificate for the modules is included in and shipped with the calibration certificate of the main unit. When ordering an analog input module separately, each module gets its own calibration certificate (one certificate per module).

Test certificate (QIC, sold separately)

When ordering the GP10/GP20 with options (analog/digital I/O), the QIC for each module is included in and shipped with the QIC of the main unit. When ordering analog input modules and digital I/O modules separately, each module gets its own QIC (one QIC per module).

User's Manual

Product user's manuals can be downloaded or viewed at the following URL.
URL: www.smartdacplus.com/manual/en/

NOTICE



- Before operating the product, read the instruction manual thoroughly for proper and safe operation.

vigilantplant.®
The clear path to operational excellence

SEE
CLEARLY

KNOW
IN ADVANCE

ACT
WITH AGILITY

VigilantPlant is Yokogawa's automation concept for safe, reliable, and profitable plant operations. VigilantPlant aims to enable an ongoing state of Operational Excellence where plant personnel are watchful and attentive, well-informed, and ready to take actions that optimize plant and business performance.

YOKOGAWA ELECTRIC CORPORATION

Network Solutions Business Div./Phone: (81)-422-52-7179, Fax: (81)-422-52-6973

E-mail: ns@cs.jp.yokogawa.com

YOKOGAWA CORPORATION OF AMERICA

Phone: 800-258-2552, Fax: (1)-770-254-0928

YOKOGAWA EUROPE B.V.

Phone: (31)-88-4641000, Fax: (31)-88-4641111

YOKOGAWA ENGINEERING ASIA PTE. LTD.

Phone: (65)-62419933, Fax: (65)-62412606

NetSOL Online

Sign up for our free e-mail newsletter
www.yokogawa.com/ns/

Vig-RS-5E

Printed in Japan, 211 (KP) [Ed.: 03/d]

Subject to change without notice

All Rights Reserved. Copyright © 2012, by Yokogawa Electric Corporation

YOKOGAWA